
KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

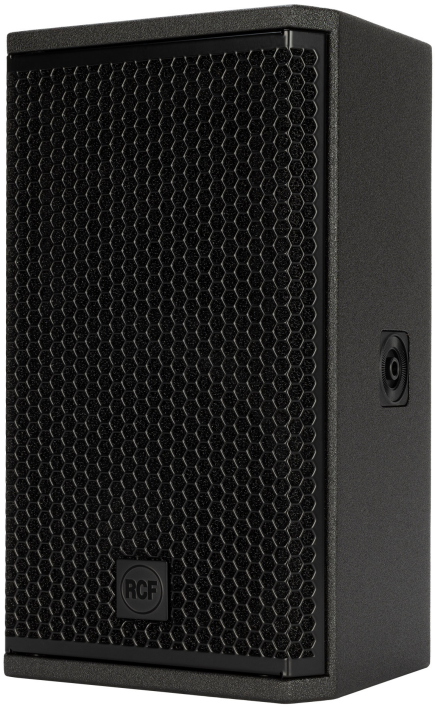

Description

The KX 08-A is a compact, high-output 2-way active speaker system engineered for professional users, combining precise directivity, high SPL capability, and advanced system integration. The low-frequency section features an 8” neodymium driver in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 1.75” PKX dome, coupled to a 90° x 70° True Resistive Waveguide, rotatable by 90° to ensure flexible coverage options. An integrated two-channel 2000 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure with Quick Fit and M10 inserts supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

Features

› 128 dB SPL Max
› Rotatable 90° x 70° TRW horn
› 8’’ neodymium woofer, 2.5’’ voice coil
› 1,75’’’ PKX dome, neodymium compression driver
› Two-channel, 2000W Class-D amplifier
› DSP Processing with FiRPHASE and BMC
› RDNet Networked Management
› powerCON TRUE1 TOP mains connectors

Part Number


13000895	KX 08-A	US	100-120 V	Black	EAN 8024530022907
13000900	KX 08-A	EU	220-240 V	Black	EAN 8024530022808
13000950	KX 08-A	UK	220-240 V	Black	EAN 8024530023355

Products are continually improved. All specifications are therefore subject to change without notice.

KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Line Art 2D

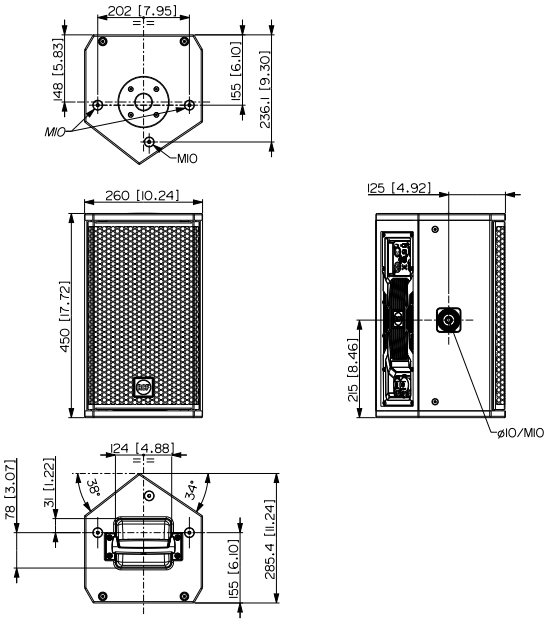

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	65 Hz - 20000 Hz
	Max SPL @ 1m	128 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0'' neo, 1.75'' v.c
	Woofer	1 x 8'' neo, 2.5'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1400Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume
	RDNet	Onboard
Power section	Total Power	2000 W Peak
	High frequencies	600 W Peak
	Mid frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant

KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	3X M10 TOP AND BOTTOM 2X PIN D.10 AND M10 SIDE
	Handles	1 TOP
	Pole mount/Cap	35 mm insert
	Grille	Steel with clothing
	Color	Black
Size / Weight	Height	450 mm / 17.72 inches
	Width	260 mm / 10.24 inches
	Depth	285.4 mm / 11.24 inches
	Weight	11 kg / 24.25 lbs

ACCESSORIES

Rigging / Mounting

FLOOR STANDS

13360109	AC PRO-FS	Black	EAN 8024530006471

FLYING BRACKETS

13360031	AC EB 4X		EAN 8024530018870

HORIZONTAL BRACKETS

13360714	HBR60714	Black	EAN 8024530023171

POLE MOUNT KITS

13360232	AC PMX		EAN 8024530010058
13360110	AC PRO-PM	Black	EAN 8024530006488
13360067	PM-KIT M20	Black	EAN 8024530014599

VERTICAL BRACKETS

13360715	VBR60715	Black	EAN 8024530023188

Protections

COVERS

13360713	CVR60713	Black	EAN 8024530023164

RAIN PROTECTIONS

13360689	RPR60689	Black	EAN 8024530022914

Cables

CABLES KIT

13360102	AC XLR 3M3F		EAN 8024530006402