TT 20-CXA

ACTIVE TWO-WAY HIGH DEFINITION MONITOR



Description

This active high output stage monitor is a full range, low-profile enclosure with symmetrical transducers arrangement. The optimized frequency and phase response, consistent coverage of 90° x 70°, and potent acoustic output make the TT20-CXA the professional choice for any stage as a monitor or, thanks to the pole socket, as full range front of house system. With an exceptional transient response and the powerful FiRPHASE processing, the TT CXA series far exceeds the capabilities of conventional stage monitors.

Features

› 131 dB SPL Max
› 1000W RMS, two-way Class-D amplifier
› 90° x 70° constant directivity coverage
› Multifuncional cabinet with symmetrical transducers' design
› FiRPHASE
› 2 x 8'' neodymium Woofers, 2.5'' voice coil

› Horn loaded 1.4" neo comp. driver, 3'' voice coil

› RDNet Networked Management


Part Number

Products are continually improved. All specifications are therefore subject to change without notice.

TT 20-CXA

ACTIVE TWO-WAY HIGH DEFINITION MONITOR

Line Art 2D

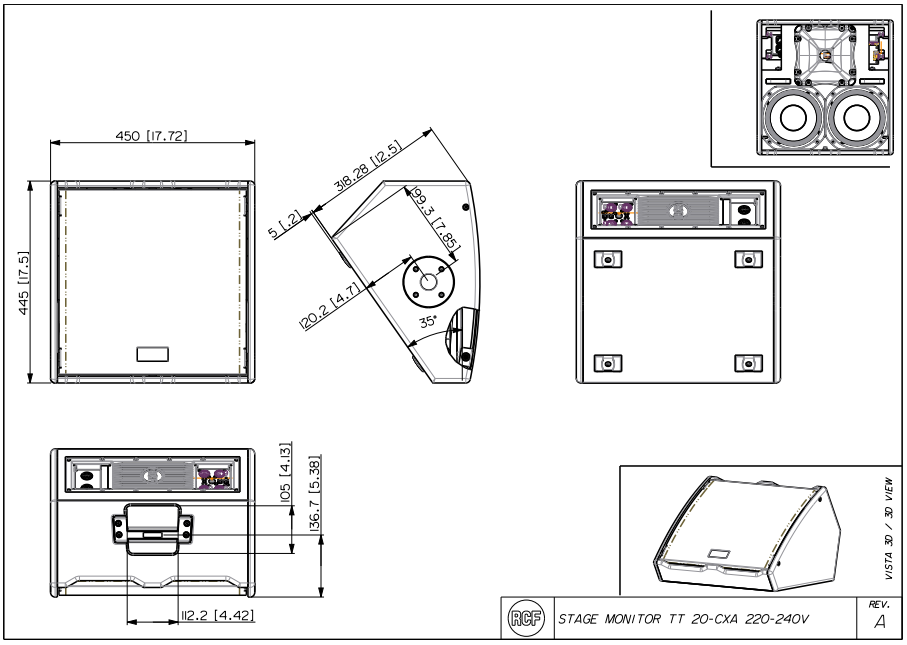

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	60 Hz - 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.5" neo, 3.0" v.c
	Woofer	2 x 8" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	900 Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume, RDnet on boar
	RDNet	Onboard
Power section	Total Power	2000 W Peak, 1000 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1400 W Peak, 700 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant

TT 20-CXA

ACTIVE TWO-WAY HIGH DEFINITION MONITOR

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Handles	1 TOP
	Grille	Steel
	Color	Black
Size / Weight	Height	318 mm / 12.52 inches
	Width	445 mm / 17.52 inches
	Depth	450 mm / 17.72 inches
	Weight	14 kg / 30.86 lbs

ACCESSORIES

Rigging / Mounting	**FLOOR STANDS**		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360067 PM-KIT M20	Black	EAN 8024530014599
Protections	**COVERS**		
	13360405 CVR TT 20-CXA	Black	EAN 8024530016340
	RAIN PROTECTIONS		
	13360689 RPR60689	Black	EAN 8024530022914
Cables	**CABLES KIT**		
	13360102 AC XLR 3M3F		EAN 8024530006402