TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR



Description

The TT25-CXA is a full range, high performance coaxial monitor. The linear response curve, the consistent coverage and acoustic output make the TT25-CXA II the professional choice for most demanding situations. The voicing is accurate and deep, the sound is transparent in the mids and extremely accurate at very high frequencies. The size is compact and the profile is very low for a discreet appearance. The TT25-CXA is a high power active system that sets a new standard in the touring and theatre sound reinforcement. By producing flat amplitude and phase response, full-range bandwidth and exceptional impulse response, the TT25-CXA far exceeds the capabilities of conventional stage monitors.

Features

› 1100 W Class D Amplifier
› 60 x 60 constant directivity coverage angle
› 15" neo coaxial woofer, 3.5" voice coil
› 1.5 " neo coaxial c. driver, 2.5" voice coil
› DSP Processing
› Onboard RDNet Control
› Multifunctional cabinet
› Very high output


Part Number

13000448 TT 25-CXA	220-240 V	Black	EAN 8024530012977
13000449 TT 25-CXA	115 V	Black	EAN 8024530013028

TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR

Line Art 2D

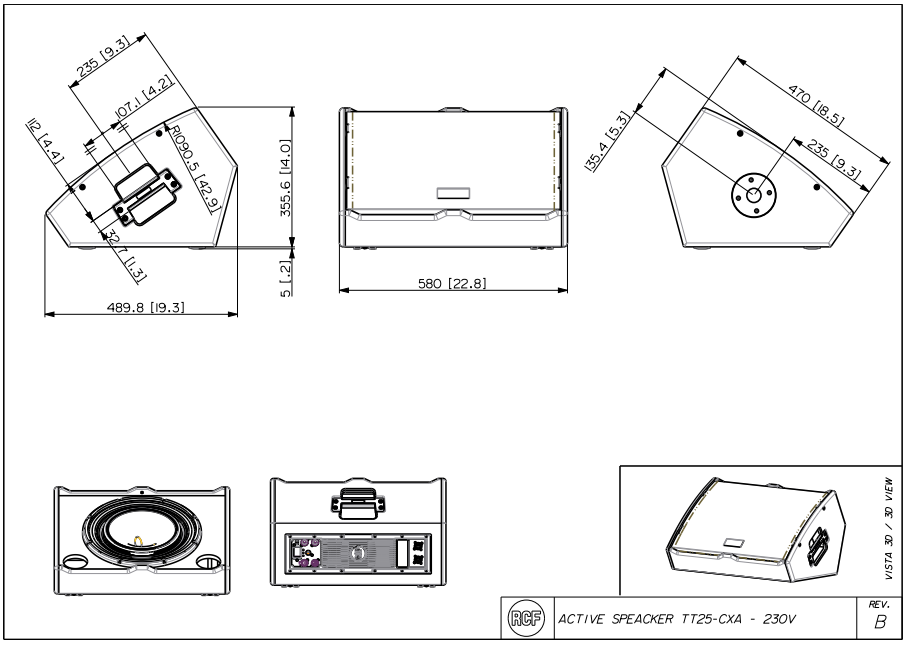

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	133 dB
	Horizontal coverage angle	60°
	Vertical coverage angle	60°
Transducers	Compression Driver	Coaxial 1.5'' neo, 2.5'' v.c
	Woofer	Coaxial 15'' neo, 3.5'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	900 Hz
	Protections	Thermal, HF
	Limiter	Soft Limiter
	Controls	Proces., 8 sel. presets
	RDNet	Onboard
Power section	Total Power	2200 W Peak, 1100 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1600 W Peak, 800 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant

TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Handles	1 Top
	Grille	Steel
	Color	Black
Size / Weight	Height	353 mm / 13.9 inches
	Width	580 mm / 22.83 inches
	Depth	486 mm / 19.13 inches
	Weight	18 kg / 39.68 lbs

ACCESSORIES

Rigging / Mounting

FLOOR STANDS

13360109	AC PRO-FS	Black	EAN 8024530006471

POLE MOUNT KITS

13360232	AC PMX		EAN 8024530010058
13360110	AC PRO-PM	Black	EAN 8024530006488
13360067	PM-KIT M20	Black	EAN 8024530014599

Protections

COVERS

13360327	CVR TT 25-CXA	Black	EAN 8024530013448

Cables

CABLES

12399019	CBL ETHERCON TO XLR F 0.2M	Black	EAN 8024530013882
12399020	CBL ETHERCON TO XLR M 0.2M	Black	EAN 8024530013899

CABLES KIT

13360102	AC XLR 3M3F		EAN 8024530006402
12399016	CBL ETHERCON 0.7M	Black	EAN 8024530013844
12399017	CBL ETHERCON 1.5M	Black	EAN 8024530013851
12399035	CBL ETHERCON 3M	Black	EAN 8024530013868
12399018	CBL ETHERCON 5M	Black	EAN 8024530013875