TTL 6-A

ACTIVE THREE-WAY LINE ARRAY MODULE



Description

The TTL6-A is a high power, three way, active line source engineered to deliver high fidelity output for use indoors and outdoors, for medium to large spaces. TTL6-A provides all the advantages of line array technology, such as high direct sound, increased range and a uniform level distribution, with additional ease of use. It is the preferred sound set-up for stacked systems and when a wider dispersion is required. The 3-way TTL6-A line source is equipped with 2 x 12” low frequencies woofers, 4 x 6.5” midranges and a 3.0” voice coil compression driver with wave-guide for distinctive homogenous directivity. The integration of four channels of digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency.

Features

› RDNet remote control
› 4 x Class D amplifier, 2200 Watt total power
› Premium-quality DSP with optimized phase response
› 1.4" neo compression driver, 3.0" voice coil with a waveguide
› 4 x 6.0" neo midranges
› 2 x 12" neo woofers
› 139 dB max SPL
› Maximum output, perfect audio fidelity
› Tour grade cabinet and mechanics
› 90°x 30°


Part Number

13000475 TTL 6-A	EU	100-240 V	Black	EAN 8024530013608
13000476 TTL 6-A	US	100-240 V	Black	EAN 8024530013592

TTL 6-A

ACTIVE THREE-WAY LINE ARRAY MODULE

Line Art 2D

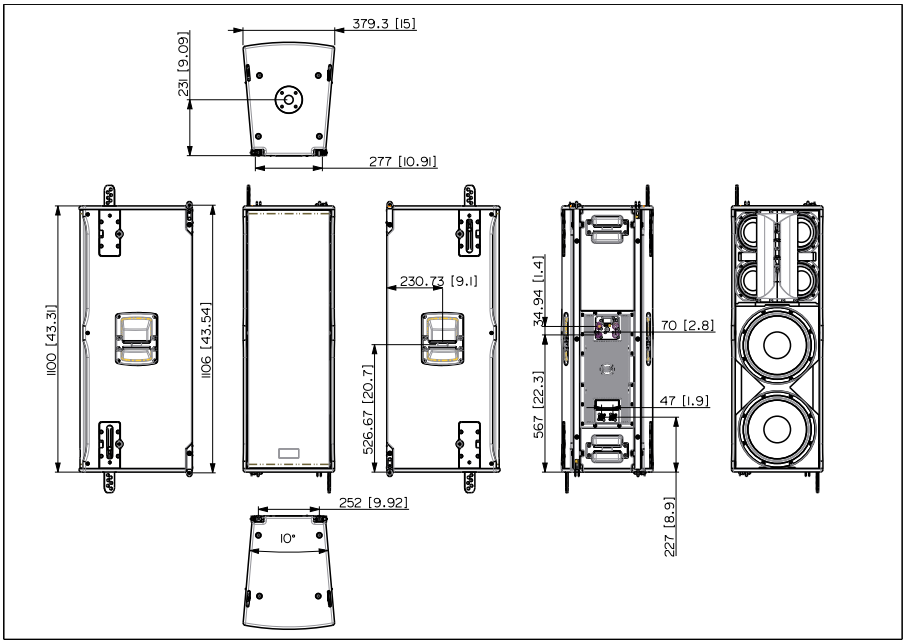

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz - 20000 Hz
	Max SPL @ 1m	139 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	30°
Transducers	Compression Driver	1 x 1.4'' neo, 3.0'' v.c
	Midrange	4 x 6.0'' neo, 2.0'' v.c
	Woofer	2 x 12'' neo, 3.0'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	200 Hz - 800 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Close, Linear, Far, 2x Presets
	RDNet	Onboard
Power section	Total Power	4400 W Peak, 2200 W RMS
	High frequencies	800 W Peak, 400 W RMS
	Mid frequencies	1400 W Peak, 700 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant

TTL 6-A

ACTIVE THREE-WAY LINE ARRAY MODULE

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	Pole Mount, integrated
	Handles	2 side, 2 back
	Grille	Steel
	Color	Black
Size / Weight	Height	1100 mm / 43.31 inches
	Width	378 mm / 14.88 inches
	Depth	468 mm / 18.43 inches
	Weight	53 kg / 116.84 lbs

ACCESSORIES

Rigging / Mounting

AZIMUT BRACKETS			
13360351	AZM-BR 2X	Black	EAN 8024530013516
FLY BARS			
13360349	FL-B TTL 6	Black	EAN 8024530013585
FLY BARS PICKUP			
13360221	FL-B PK HDL 20-18	Black	EAN 8024530018221
QUICK LOCK PINS			
13360626	QL-PIN 008	Black	EAN 8024530020897
13360634	QL-PIN 011	Black	EAN 8024530022433
SUSPENSION CHAINS			
13360129	HOIST SPACING CHAIN CH 001	Black	EAN 8024530020774

Cables

CABLES			
12399019	CBL ETHERCON TO XLR F 0.2M	Black	EAN 8024530013882
12399020	CBL ETHERCON TO XLR M 0.2M	Black	EAN 8024530013899
CABLES KIT			
13360102	AC XLR 3M3F		EAN 8024530006402
12399016	CBL ETHERCON 0.7M	Black	EAN 8024530013844
12399017	CBL ETHERCON 1.5M	Black	EAN 8024530013851
12399035	CBL ETHERCON 3M	Black	EAN 8024530013868
12399018	CBL ETHERCON 5M	Black	EAN 8024530013875
12399023	CBL LK 25 MULTIPIN 10M	Black	EAN 8024530013837
12399022	CBL LK 25 MULTIPIN 20M	Black	EAN 8024530013820
12399024	CBL LKS 19 ARRAY FANOUT	Black	EAN 8024530013905
12399026	CBL LKS 19 BREAKOUT	Black	EAN 8024530013929
12399027	CBL LKS 19 POWER 10M	Black	EAN 8024530013936
13360146	CBL LKS 19 POWER 20M		EAN 8024530013943
12399025	CBL LKS 19 SUB FANOUT	Black	EAN 8024530013912
12399021	CBL LKS 25-2 FANOUT	Black	EAN 8024530013813
13360145	CBL POWER BOX 6X	Black	EAN 8024530015534
12399031	CBL POWERCON LINK 0.7M	Black	EAN 8024530013738
12399030	CBL POWERCON LINK 1.5M	Black	EAN 8024530013721

Cables	12399028	CBL POWERCON LINK 10M	Black	EAN 8024530013707
	12399029	CBL POWERCON LINK 5M	Black	EAN 8024530013714
	13360138	POWER CABLE X6 TTL 55-A		